

## HEAT DETECTOR MODEL 1000

### Approvals

- AS1603.1-1995 TESTED - Type E HEAT DETECTOR
- ACTIVEFIRE LISTED (CSIRO Aust. Govt.)
- PATENT No. 699529

### FEATURES

- RESETTING TYPE HEAT DETECTOR
- RATE COMPENSATION & FAST RESPONSE
- WIDE TEMPERATURE RANGE.
- GOLD PLATED ELECTRICAL CONTACTS.
- CORROSION & SHOCK RESISTANT.
- SINGLE MOUNTING THREAD - Model 1000 - 1 Metric M20
- DUAL MOUNTING THREAD - Model 1000 - 2 Metric M20 & ½”NPT
- INTRINSICALLY SAFE: Classed as a simple apparatus and installed with a suitable I.S. barrier.



### DESCRIPTION

The Thermac Detector is a heat sensitive electrical switch. It is a fixed temperature device with a factory pre-set temperature in the range 60 °C to 240 °C. The detector comprises a pair of normally open electrical contacts mounted within a stainless steel probe. A rise in temperature will cause the contacts to close at the set point temperature. With a drop in temperature the procedure reverses and the contacts re-open below the set point temperature. The detector body is a seamless one-piece unit, precision machined from AISI 316 stainless steel with high corrosion resistance. Electrical contacts are gold/silver plated and lead cables are nickel plated copper with PTFE/glass insulation. Cables are to aircraft engine specification. The operating parts are factory calibrated and sealed against severe environmental conditions, further adjustment or calibration is not required.

### SPECIFICATION

Contacts: .....	Normally open, close on temperature rise.
Applied Voltage AC @ 0.25A .....	32 V max.
Applied Voltage DC @ 0.25A .....	32 V max.
Operating Current: .....	0.25A max.
Operating or Set Temperature Range: .....	+60 °C to +240 °C
Ambient Temperature Range: (continuous exposure).....	-40 °C to +180 °C
Relative Humidity: .....	100%
Weight: .....	150 g.
Degree of Protection: .....	IP 67
Sensitivity & Accuracy: .....	+/- 5% or 5 degrees
Mounting Screw Threads: .....	10 Kgm torque max.

#### NOTES:


1. All electrical ratings apply to noninductive loads. Ensure circuit inrush currents do not exceed ratings.
2. Where a detector has been subjected to a fire or overheat, the unit should be returned to Thermac for condition check and calibration.

## TEMPERATURE SETTINGS

### DEGREES CELSIUS

Detectors may be set to any nominated operating temperature between 60 and 240 degree Celsius. Suggested temperature setting 20°C above maximum ambient.

## INSTALLATION

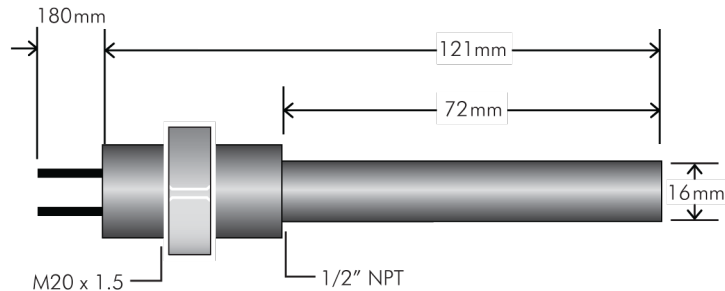


### INSTALLATION OF MODEL 1000 :

- **NORMAL LOCATIONS** The unit is mounted using the 20mm electrical conduit screw thread to a standard junction box or equivalent. Apply silicone sealant to cable joints if there is a risk of water or chemical exposure. Avoid pulling electrical cables or causing cables to be in tension.
- **SPECIAL THROUGH WALL LOCATIONS** The Model 1000-2 is screwed into a 1/2"–14 NPT hole in the plant or vessel wall to a maximum torque 10 Kgm. Ensure the entire length of the sensing shell (72 mm) is exposed to the heat source.

### CIRCUIT DIAGRAM:

- Normally open contacts close on temperature rise.
- Cables are 20 swg with 2mm O.D. insulation.
- Installation and connection to be in accordance with AS1603.1, AS1603.4 and AS1670.

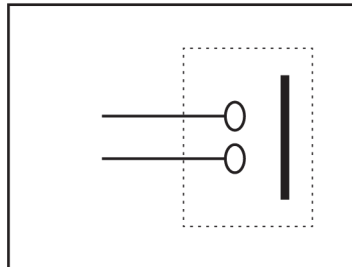

### IDENTIFICATION STAMPING ON HEX:

- Serial numbers are 4 or 5 digits, e.g. '10000'
- Set temperature in degrees Celsius, e.g. '120°C'

### IDENTIFICATION MARKING ON BARREL:

- 'Thermac Model 1000 Detector'
- 'Thermal Type E Made 1994'
- '0 – 32 Vac 0.25A 0 – 32 Vdc 0.25A'
- 'Contacts close on temperature rise'

### TO ORDER:

Please specify Set Temperature (degrees Celsius) e.g. TYPE E HEAT DETECTOR, MODEL 1000 –1 @120 °C