



ekhō

### Features

- ▶ Approved to AS ISO 7240 Parts 11 & 25
- ▶ RED compliant
- ▶ Bi-directional wireless communication
- ▶ Self optimising wireless amplitude and frequency
- ▶ Tamper switch
- ▶ Utilises standard low cost lithium battery technology
- ▶ Up to 10 years battery life\*
- ▶ Resettable Element
- ▶ Clear 'device activated' warning flag

### Description

A Wireless Resettable Manual Call Point which features a simulated glass front.

When activated, a plastic 'flag' is displayed in the window of the unit; the supplied key will reset the flag and unit. Supplied with back box.



### Specifications

|   |                                      |                                 |
|---|--------------------------------------|---------------------------------|
| Ordering code                                     | EK-WL8-CP/AU                         |                                 |
| Operating frequency range                         | 918 - 926 MHz                        |                                 |
| Communication range (in open air)                 | 1200 m                               |                                 |
| Modulation type                                   | GFSK                                 |                                 |
| Operating frequency channels                      | 6                                    |                                 |
| Max. radiated power                               | ≤ 25 mW                              |                                 |
| Time period between wireless signal transmissions | 2 minutes                            |                                 |
| Operating temperature range                       | - 10 °C to + 55 °C                   |                                 |
| Max. tolerated humidity                           | 95% RH (non condensing)              |                                 |
| Dimensions (mm)                                   | H 87 x W 87 x D 62                   |                                 |
| Power supply<br>(Dual 3V lithium batteries)       | 1 x Primary cell (CR123A)            | 1 x Secondary cell (CR2032A)    |
|   | 1.2 Ahr                              | 0.24 Ahr                        |
|   | Up to 10 years primary battery life* | 3 months secondary battery life |

### Standards & Approvals

AS ISO 7240-11 Call Points

AS ISO 7240-25 Components using radio links



\*Dependant on operational usage

### Features

- ▶ Approved to AS ISO 7240 Parts 18 & 25
- ▶ RED compliant
- ▶ Supports MESH communications
- ▶ Bi-directional wireless communication
- ▶ Self optimising wireless amplitude and frequency
- ▶ Makes additions to existing wired systems easy and cost effective
- ▶ Requires external power supply (24 VDC).



### Description

The EK-WL8-EXP/AU Expander Module increases radio coverage of an Ekho Translator Module, allowing the use of the system in larger buildings and in difficult wireless environments. Multiple Expanders can be utilised in a micro cell structure to provide a solution to large, complex systems.

When multiple Expander Modules (two or more) are used, these provide a MESH solution maintaining the wireless systems integrity. The system allows up to 126 Expander Modules or field devices to be configured to any one Translator Module\*.

Any combination of Ekho wireless devices can be connected to the Expander Module\*. The Expander Module transmits the intelligent device information from the field devices to the Loop Translator Module using a highly stable bi-directional radio communication protocol. The system parameters are programmed into the Expander Module via the Translator Module.

The Expander Module Is fitted with two Internal antennas reducing signal fading and ensuring reliable radio communications. Optional back box available.

### Specifications

|   |   |   |
|---|---|---|
| Ordering code                                     | EK-WL8-EXP/AU                               | Optional Back box is available (EK-BBOX-01) |
| Operating frequency range                         | 918 - 926 MHz                               |   |
| Communication range (in open air)                 | 1200 m                                      |   |
| Modulation type                                   | GFSK  |   |
| Operating frequency channels                      | 6   |   |
| Max. radiated power                               | ≤ 25 mW                                     |   |
| Time period between wireless signal transmissions | 2 minutes                                   |   |
| Current consumption                               | 80 mA                                       |   |
| Operating voltage                                 | 11 - 28 VDC                                 |   |
| Operating temperature range                       | - 10 °C to + 55 °C                          |   |
| Max. tolerated humidity                           | 93% RH (non-condensing)                     |   |
| Weight (g) / Dimensions (mm)                      | 320 / H 143 x W 210 x D 42 without Back box |   |

### Standards & Approvals

AS ISO 7240-18 Input/Output Devices

AS ISO 7240-25 Components using radio links



\*Dependant on available loop address capacity

### Features

- ▶ Approved to AS ISO 7240 Parts 5 & 25
- ▶ RED compliant
- ▶ Internal algorithm processing for optimal performance
- ▶ Tamper switch
- ▶ Up to 10 years battery life\*
- ▶ Utilises standard low cost lithium battery technology
- ▶ Bi-directional wireless communications
- ▶ Self optimising wireless amplitude and frequency
- ▶ Compatible with Ekho Translator/Expander module.



### Description

The EK-WL8-H/AU is a wireless A1R heat sensor. It is a fully intelligent device and compatible with the Ekho wireless Translator and Expander modules.

The sensor is designed for installations where smoke detection technology is not suitable.

The well-proven adaptive radio signal processing algorithms ensure the highest levels of life safety and system reliability are achieved. An in-built magnet test allows easy activation to verify correct functionality and response.

### Specifications

|   |                                      |                              |
|---|--------------------------------------|------------------------------|
| Ordering code                               | EK-WL8-H/AU                          |                              |
| Operating frequency range                   | 918 - 926 MHz                        |                              |
| Communication range (in open air)           | 1200 m                               |                              |
| Modulation type                             | GFSK                                 |                              |
| Operating frequency channels                | 6                                    |                              |
| Max. radiated power                         | ≤ 25 mW                              |                              |
| Class A1R                                   | 58 °C max.                           |                              |
| Operating temperature range                 | - 10 °C to + 55 °C                   |                              |
| Max. tolerated humidity (non condensing)    | 95% RH                               |                              |
| Dimensions (mm)                             | 160 / ø 111 x H 65                   |                              |
| Power supply<br>(Dual 3V lithium batteries) | 1 x Primacy cell (CR123A)            | 1 x Secondary cell (CR2032A) |
|   | 1.2 Ahr                              | 0.24 Ahr                     |
|   | Up to 10 years primary battery life* | 3 months                     |

### Standards & Approvals

AS ISO 7240-5 Heat Point Detectors

AS ISO 7240.25 Components using radio links



\*Dependant on operational usage

### Features

- ▶ Approved to AS ISO 7240 Parts 5,7,25 & 29
- ▶ RED compliant
- ▶ Internal algorithm processing optimises performance
- ▶ Tamper switch
- ▶ Up to 10 years battery life\*
- ▶ Utilises standard low-cost lithium battery technology
- ▶ Bi-directional wireless communications
- ▶ Self optimising wireless amplitude and frequency
- ▶ Compatible with all Ekho Translator/Expander modules.



### Description

The EK-WL8-OH/AU is the latest in wireless multi-criteria sensor technology. It is a fully intelligent device and compatible with the Ekho wireless Translator and Expander modules.

The sensor combines both smoke and (A1R) heat detection technologies for improved performance, which can contribute to reducing unwanted alarms.

Utilising well-proven adaptive radio signal processing algorithms ensures that the highest levels of life safety and system reliability are achieved.

An in-built magnet test allows easy activation to verify correct functionality and response.

### Specifications

|   |                                      |                                 |                             |
|---|--------------------------------------|---------------------------------|-----------------------------|
| Ordering code                               | EK-WL8-OH/AU                         |                                 |                             |
| Operating frequency range                   | 918 - 926 MHz                        |                                 |                             |
| Communication range (in open air)           | 1200 m                               |                                 |                             |
| Modulation type                             | GFSK                                 |                                 |                             |
| Operating frequency channels                | 6                                    |                                 |                             |
| Max. radiated power                         | ≤ 25 mW                              |                                 |                             |
| Operating modes                             | Smoke only                           | A1R Heat only                   | Smoke and A1R Heat combined |
| Operating temperature range                 | - 10 °C to + 55 °C                   |                                 |                             |
| Max. tolerated humidity                     | 95% RH (non-condensing)              |                                 |                             |
| Weight (g) / Dimensions (mm)                | 160 / ø 111 x H 57                   |                                 |                             |
| Power supply<br>(Dual 3V lithium batteries) | 1 x Primacy cell (CR123A)            | 1 x Secondary cell (CR2032A)    |                             |
|   | 1.2 Ahr                              | 0.24 Ahr                        |                             |
|   | Up to 10 years primary battery life* | 3 months secondary battery life |                             |

### Standards & Approvals

AS ISO 7240-5 Heat Point Detectors

AS ISO 7240-7 Smoke Detectors


AS ISO 7240-25 Components using radio links



\*Dependant on operational usage

### Features

- ▶ Approved to AS ISO 7240 Parts 18 & 25
- ▶ RED compliant
- ▶ Monitored Input
- ▶ Bi-directional wireless communication
- ▶ Self optimising wireless amplitude and frequency
- ▶ Tamper Switch
- ▶ Up to 10 years battery life\*.

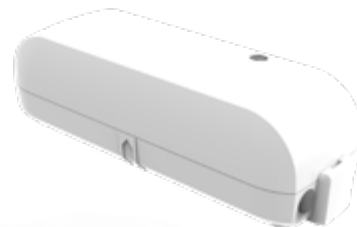

### Description

The EK-WL8-IN/AU is a Single Channel Input Module providing a convenient and cost effective solution for monitoring third party equipment.

The module is also controllable from the Fire Control Panel via the cause and effect programming and offers the same level of flexibility as a standard addressable module. Optional back box available.

### Specifications

|   |   |  |
|---|---|--|
| Ordering code                                     | EK-WL8-IN/AU                                | Optional Back box is available EK-BOX-02 |
| Operating frequency range                         | 918 - 926 MHz                               |  |
| Communication range (in open air)                 | 1200 m                                      |  |
| Modulation type                                   | GFSK  |  |
| Operating frequency channels                      | 6   |  |
| Max. radiated power                               | ≤ 25 mW                                     |  |
| Time period between wireless signal transmissions | 2 minutes                                   |  |
| Operating temperature range                       | - 10 °C to + 55 °C                          |  |
| Max. tolerated humidity                           | 95% RH (non-condensing)                     |  |
| Weight (g) / Dimensions (mm)                      | 70 / H 109 x W 37 x D 30 (without back box) |  |
| Power supply<br>(Dual 3V lithium batteries)       | 1 x Primacy cell (CR123A)                   | 1 x Secondary cell (CR2032A)             |
|   | 1.2 Ahr                                     | 0.24 Ahr                                 |
|   | Up to 10 years primary battery life*        | 3 months secondary battery life          |

### Standards & Approvals

AS ISO 7240-18 Input/Output devices

AS ISO 7240-25 Components using radio links



\*Dependant on operational usage

### Features

- ▶ Approved to AS ISO 7240 Parts 7 & 25
- ▶ RED compliant
- ▶ Internal algorithm processing for optimal performance
- ▶ Tamper switch
- ▶ Up to 10 years battery life\*
- ▶ Utilises standard low cost lithium battery technology
- ▶ Bi-directional wireless communications
- ▶ Self optimising wireless amplitude and frequency
- ▶ Compatible with all Ekho Translator/Expander modules.



### Description

The EK-WL8-O/AU wireless optical smoke sensor is the latest in wireless smoke sensor technology. It is a fully intelligent device and compatible with the Ekho wireless Translator and Expander modules.

The sensor utilises optical smoke detection technologies and algorithms for improved performance, which can contribute to reducing unwanted alarms.

Utilising well-proven adaptive radio signal processing algorithms ensure the highest levels of life safety and system reliability are achieved.

An in-built magnet test allows easy activation to verify correct functionality and response.

### Specifications

|   |                                      |                                 |
|---|--------------------------------------|---------------------------------|
| Ordering code                               | EK-WL8-O/AU                          |                                 |
| Operating frequency range                   | 918 - 926 MHz                        |                                 |
| Communication range (in open air)           | 1200 m                               |                                 |
| Modulation type                             | GFSK                                 |                                 |
| Operating frequency channels                | 6                                    |                                 |
| Max. radiated power                         | ≤ 25 mW                              |                                 |
| Operating temperature range                 | - 10 °C to + 55 °C                   |                                 |
| Max. tolerated humidity (non condensing)    | 95% RH                               |                                 |
| Dimensions (mm)                             | ø 111 x H 57                         |                                 |
| Power supply<br>(Dual 3V lithium batteries) | 1 x Primary cell (CR123A)            | 1 x Secondary cell (CR2032)     |
|   | 1.2 Ahr                              | 1.2 Ahr                         |
|   | Up to 10 years primary battery life* | 8 months secondary battery life |

### Standards & Approvals

AS ISO 7240-7 Smoke Detectors

AS ISO 7240-25 Components using radio links



\*Dependant on operational usage



### Features

- ▶ Approved to AS ISO 7240 Parts 18 & 25
- ▶ RED compliant
- ▶ Contact is configured as 24 VDC output Bi-directional wireless communication Up to 10 years battery life\*
- ▶ Self optimising wireless amplitude and frequency
- ▶ Includes a fault monitoring input
- ▶ Requires external power supply (24V DC).



### Description

A Wireless Single Channel Output Module which allows the control panel to switch the circuits of an external device wirelessly via an Ekho Translator/Expander module.

The unit provides a switched voltage output (24 VDC recommended) only. Optional back box is available.

### Specifications

|   |   |   |
|---|---|---|
| Ordering code                                     | EK-WL8-OUT/AU                               | Optional Back box is available EK-BBOX-01 |
| Operating frequency range                         | 918 - 926 MHz                               |   |
| Communication range (in open air)                 | 1200 m                                      |   |
| Modulation type                                   | GFSK  |   |
| Operating frequency channels                      | 6   |   |
| Max. radiated power                               | ≤ 25 mW                                     |   |
| Time period between wireless signal transmissions | 2 minutes                                   |   |
| External power supply voltage                     | 12 - 24 VDC                                 |   |
| Operating temperature range                       | - 10 °C to + 55 °C                          |   |
| Switched voltage rating*2                         | 30 VDC / 250 VAC @ 8A                       |   |
| Max tolerated humidity                            | 93% RH (non-condensing)                     |   |
| Weight (g) / Dimensions (mm)                      | 350 / H 143 x W 210 x D 42 without Back box |   |
| Power supply<br>(Dual 3V lithium batteries)       | 1 x Primary cell (CR123A)                   | 1 x Secondary cell (CR123A)               |
|   | 1.2 Ahr                                     | 1.2 Ahr                                   |
|   | Up to 10 years primary battery life*        | 8 months secondary battery life           |

### Standards & Approvals

AS ISO 7240-18 Input/Output devices


AS ISO 7240-25 Components using Radio Links



\*Dependant on operational usage \*2Supply voltage dependant



## Relay Diagram

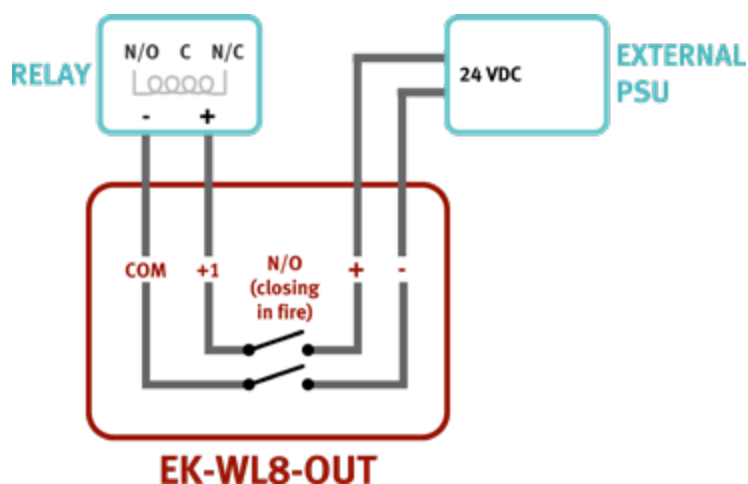

The external PSU will supply the voltage to the power terminals of the Ekho Output Module (rated for 250 VAC but we would recommend only using VDC). When the fire alarm is activated, the Output Module will switch the voltage by closing the two contacts.

The voltage is then transferred to the COM and +1 terminals. Please note that a connection from these terminals to a third party relay unit is required. The voltage will then be applied to the coil of the relay and the contacts will operate

### Features

- ▶ Approved to AS ISO 7240 Parts 3, 7, 23 & 25
- ▶ RED compliant
- ▶ Voice Sounder and VAD Incorporated Internal algorithm processing for optimal performance
- ▶ Tamper switch
- ▶ Up to 10 years battery life\*
- ▶ Utilises standard low cost lithium battery technology
- ▶ Bi-directional wireless communications
- ▶ Self optimising wireless amplitude and frequency
- ▶ Compatible with all Ekho Translator/Expander modules.



### Description

The EK-WL8-OV is a wireless optical smoke sensor that incorporates a voice sounder and visual alarm device (VAD) with white LEDs and 0.5 Hz flash rate. The sensor utilises optical smoke detection technologies and algorithms for

improved performance, which can contribute to reducing unwanted alarms. Utilising well-proven adaptive radio signal processing algorithms ensure the highest levels of life safety and system reliability are achieved.

### Specifications

|   |  |                                 |
|---|--|---------------------------------|
| Ordering code                               | EK-WL8-OV/AU                                       |                                 |
| Operating frequency range                   | 918 - 926 MHz                                      |                                 |
| Communication range (in open air)           | 1200 m   |                                 |
| Modulation type                             | GFSK   |                                 |
| Operating frequency channels                | 6  |                                 |
| Max. radiated power                         | ≤ 25 mW  |                                 |
| Number of messages                          | 3 (only one message can be played at any one time) |                                 |
| Sound pressure level @ 1m                   | >91 dB(A) for all messages                         |                                 |
| Frequency range                             | 500 - 3500 Hz                                      |                                 |
| VAD LED colour / Rating                     | White / C-3-2.6                                    |                                 |
| Flash frequency                             | 0.5 Hz   |                                 |
| Operating temperature range                 | - 10 °C to + 55 °C                                 |                                 |
| Max. tolerated humidity                     | 95% RH (non-condensing)                            |                                 |
| Weight (g) / Dimensions (mm)                | 215 / Ø 111 x H 74                                 |                                 |
| Power supply<br>(Dual 3V lithium batteries) | 1 x Primary cell (CR123A)                          | 1 x Secondary cell (CR123A)     |
|   | 1.2 Ahr  | 1.2 Ahr                         |
|   | Up to 10 years primary battery life*               | 8 months secondary battery life |

### Standards & Approvals

AS ISO 7240-3: Sounders

AS ISO 7240-23: Visual Alarm Devices

AS ISO 7240-7 Smoke Detectors

AS ISO 7240-25: Components using radio links



\*Dependant on operational usage

### Features

- ▶ Approved to AS ISO 7240 Parts 17, 18 & 25
- ▶ RED compliant
- ▶ Loop Powered
- ▶ OLED Graphical Display
- ▶ Integral Loop Short Circuit Isolator
- ▶ Bi-directional wireless communication
- ▶ Self-optimising wireless amplitude and frequency
- ▶ Tamper switch
- ▶ Flexible on site device adjustment
- ▶ Makes additions to existing wired systems easy and cost effective.



### Description

The EK-WL8-TRH/AU is a fully intelligent wired to wireless Translator Module. Compatible with the Hochiki ESP protocol, the module allows the use of fully intelligent radio (wireless) field devices alongside standard hard wired devices.

The Translator Module allows the connection of up to 126\* Expanders and radio field devices to an addressable fire detection loop. Multiple Translators can be used on a system providing the system has sufficient loop power and addresses available.

The Translator Module incorporates a Loop Short Circuit Isolator and an OLED display to allow the Translator to be easily programmed.

Each radio field device takes a loop address making them fully intelligent and their radio connectivity transparent to the end user. System parameters are programmed via the Translator Module and a PC link. The Translator Module automatically manages sensor radiated power depending on the device communication quality. The unit is fitted with two Internal antennas which reduce radio fade and ensure reliable radio communication. Optional back box available.

### Specifications

|   |   |   |
|---|---|---|
| Ordering code                                     | EK-WL8-TRH/AU                               | Optional Back box is available EK-BBOX-01 |
| Operating frequency range                         | 918 - 926 MHz                               |   |
| Communication range (in open air)                 | 1000 m                                      |   |
| Modulation type                                   | GFSK  |   |
| Operating frequency channels                      | 6   |   |
| Max. radiated power                               | ≤ 25 mW                                     |   |
| Time period between wireless signal transmissions | 2 minutes                                   |   |
| Current consumption                               | 27 mA                                       |   |
| Operating voltage                                 | 17 - 41 VDC                                 |   |
| Max. tolerated humidity                           | 95% RH (non-condensing)                     |   |
| Operating temperature range                       | - 10 °C to + 55 °C                          |   |
| Weight (g) / Dimensions (mm)                      | 300 / H 143 x W 210 x D 42 without Back box |   |

### Standards & Approvals

AS ISO 7240-17 Short Circuit Isolators

AS ISO 7240-25 Components using Radio Links

AS ISO 7240-18 Input/Output Devices



\*Dependant on available loop address capacity

### Features

- Flexible modular design
- Approved to AS ISO 7240 Parts 3 & 25
- RED compliant
- Bi-directional wireless communication
- Self optimising wireless amplitude and frequency
- Tamper Switch
- 4 Tone Settings
- Up to 10 year battery life\*
- Easy to install

### Description

The EK-WL8-SND/AU is a Wall Sounder equipped with our wireless modular alarm device range and is equipped with 4 tones which can be set locally at the sounder as well as volume control to allow for effective communication.

When configured onto an Ekho Translator, the Wireless Sounder is fully addressable and benefits from intelligent monitoring functionality.



### Specifications

|   |                                      |                                 |
|---|--------------------------------------|---------------------------------|
| Ordering code                                     | EK-WL8-SND/AU                        |                                 |
| Operating frequency range                         | 918 - 926 MHz                        |                                 |
| Communication range (in open air)                 | ≤ 1200 m                             |                                 |
| Modulation type                                   | GFSK                                 |                                 |
| Operating frequency channels                      | 6                                    |                                 |
| Max. radiated power                               | ≤ 25 mW                              |                                 |
| Time period between wireless signal transmissions | 2 minutes                            |                                 |
| Number of tones                                   | 4 (set via DIL switch on the unit)   |                                 |
| Max. sounder output                               | 93 dB(A) @ 1 metre                   |                                 |
| Max. tolerated humidity                           | 95% RH (non condensing)              |                                 |
| Operating temperature range                       | - 10 °C to + 55 °C                   |                                 |
| Dimensions (mm)                                   | H 90 x W 90 x D 97                   |                                 |
| Power supply<br>(Dual 3V lithium batteries)       | 1 x Primary cell (CR123A)            | 1 x Secondary cell (CR123A)     |
|   | 1.2 Ahr                              | 1.2 Ahr                         |
|   | Up to 10 years primary battery life* | 8 months secondary battery life |

### Standards & Approvals

EN54-3 Sounders

AS ISO 7240-25 Components using radio links



\*Dependant on operational usage

### Features

- ▶ Robust carry case
- ▶ Easy to use (training is required before purchase)
- ▶ Allows for surveying potential hybrid wireless installations.



### Description

This Ekho test kit consists of a portable wireless translator, a wireless smoke sensor and a keypad.

The keypad displays the wireless communication signals between the

sensor and the translator module, enabling you to design a wireless system successfully.

Power supply not included.

### Specifications

|                               |                                       |
|-------------------------------|---------------------------------------|
| Ordering code                 | EK-WL8-SK                             |
| Weight (kg) / Dimensions (mm) | 5.35 / H 430 mm x W 370 mm x D 160 mm |

### Standards & Approvals

