

## Expander Module

### Standard Features

The RSM-EXP-AS Expander Module increases radio coverage of a FIREwave RSM-WTM-AS Translator Module, and conventional interface module allowing the use of the system in larger buildings and in difficult wireless environments. Multiple Expanders can be utilised in a micro cell structure to provide a solution to large, complex systems.


Up to 7 Expander Modules may be configured to any one Translator Module and conventional interface module forming a micro cell cluster. Each cluster can be programmed with up to 32 radio field devices. These devices can comprise of any combination of detectors, call point and input modules and include up to 16 sounders and output devices.

The Expander Module relays the intelligent device information from the field devices to the Loop Translator Module using a highly stable bi-directional radio communication protocol. The system parameters are programmed into the Expander Module via an RS232 PC link.

The unit is housed in an IP65 housing making it suitable for mounting in a wet environment or outdoors and is also fitted with two orthogonal antennae, reducing signal fading and ensuring reliable radio communications.

Bi-directional wireless communication with self optimising wireless frequency and amplitude


- “Microcell” technology allows flexible system design and improved performance on all sizes of system
- Fully compatible with all FIREwave devices
- Easy and cost-effective additions to existing wired systems
- IP65 protection for exterior mounting

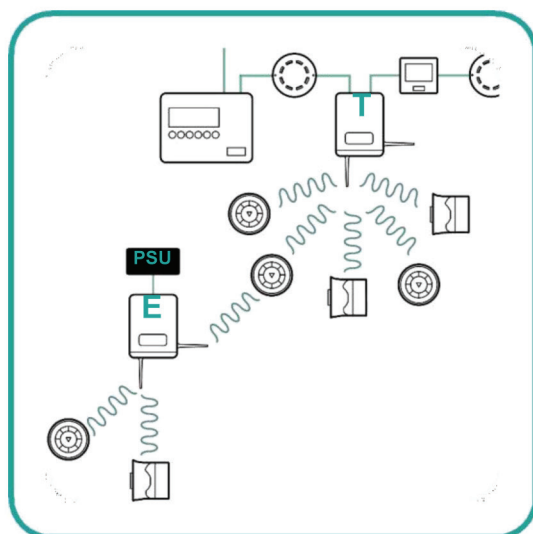


**Technical Specifications**

Ordering code	RSM-EXP-AS
Communication range with the field devices	100 m (open space)
Communication with RSM-WTM Translator Module	200 m (open space)
Operating frequency	916 MHz
Modulation type	Frequency Shift Keying
Number of operating channels	7
Time period between wireless signal transmissions	From 7 seconds to 2 minutes
Operating temperature range	-30 °C to +50 °C
Radiated power	0.01 - 10 mW
Current consumption	15 mA
Operating voltage	10 - 27 V dc
IP Rating	IP65

**DIMENSIONS**

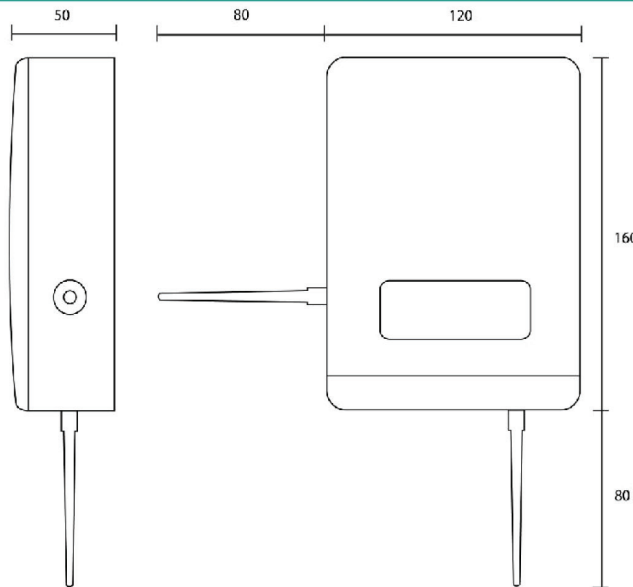

**TYPICAL APPLICATION**

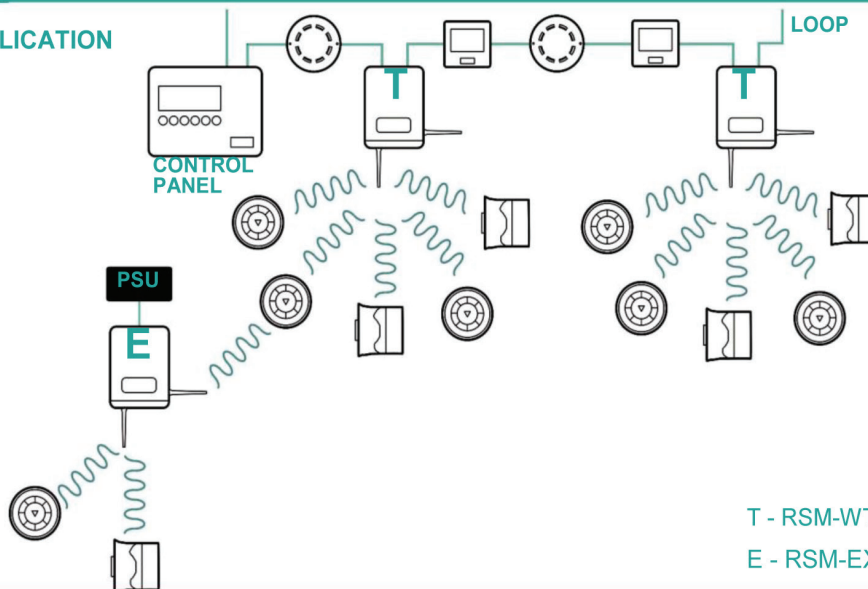

T - RSM-WTM-AS Translator Module  
E - RSM-EXP-AS Expander Module