



Assembly Layout and fitting instructions


PLEASE READ CAREFULLY BEFORE FITTING DEVICE

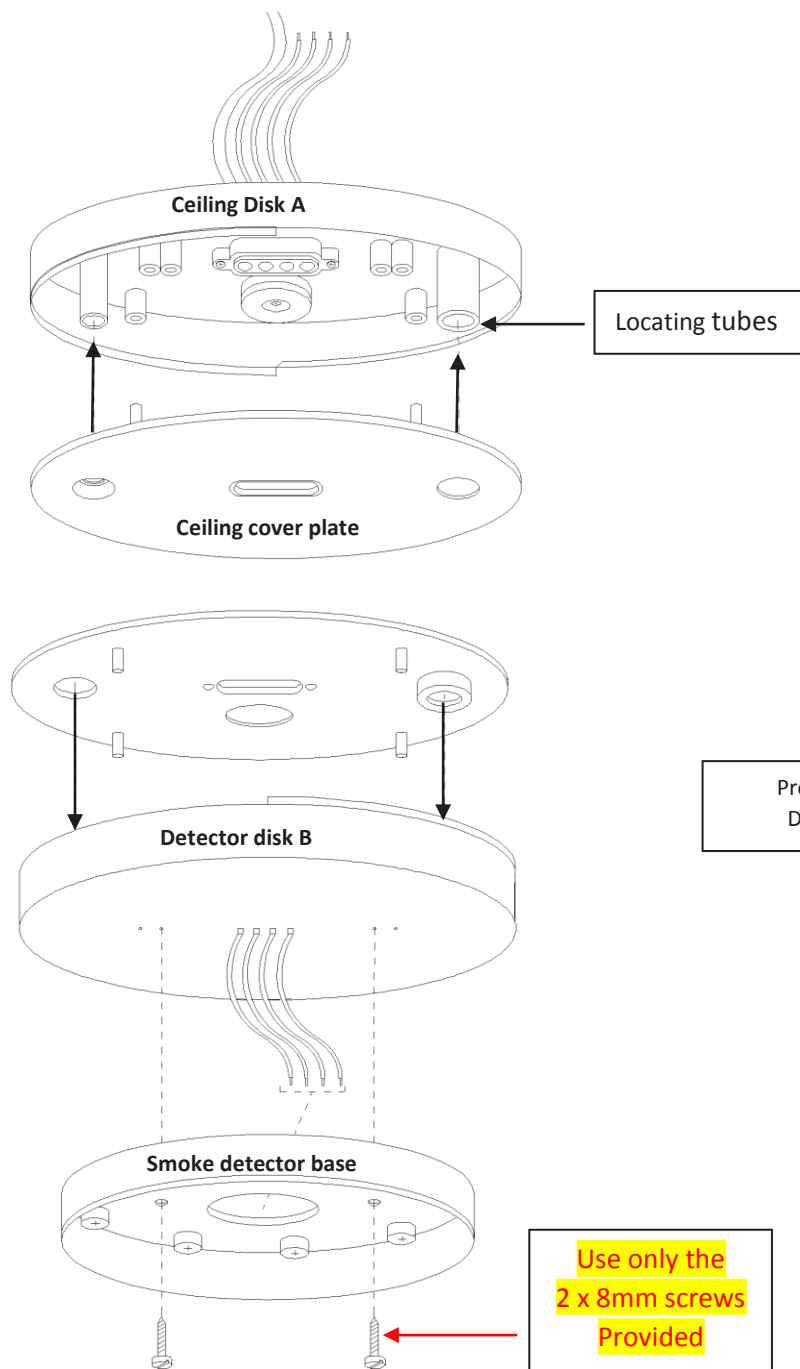

CEILING DISK A Diagram 1

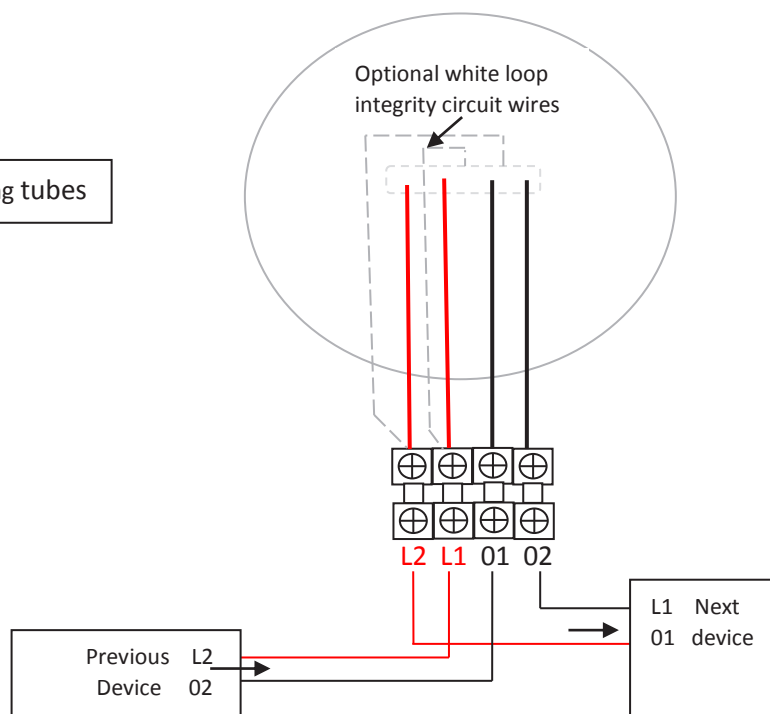

SMOKE DETECTOR BASE

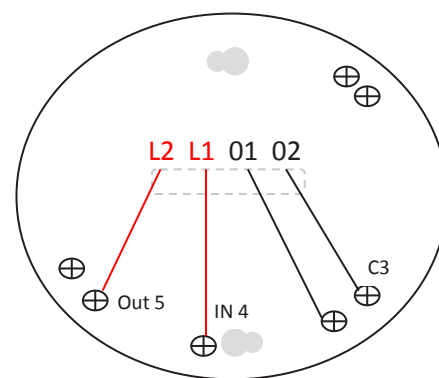

KEY FEATURES

1. Fix Disk A to ceiling or Besa box using predrilled holes provided making all necessary wiring connections, If present, the white loop integrity wires should be connected at this time (Diagram 1). for uneven surfaces on ceilings, fill any gaps around base of Disk A with anti-pick mastic
2. Do not fix the ceiling cover plate into Disk A until wiring has been checked, once fully in place, any attempt of removal will cause damage to the locating pins on the cover plate or to Disk A and will be charged for .
3. Connect your smoke detector base to Disk B using the 2 x 8mm screws provided, and make necessary wiring connections
4. Hold Disk A to Disk B letting the magnets and locating tubes guide the units in place until they click together, they will only connect 1 way
5. Check all connections and circuits.
6. Finally, separate Disk B from Disk A, and fit ceiling cover plate in to place into Ceiling Disk A , pressing hard to fully engage the pins, it is important that the cover plate is pushed fully home.