


Electromagnetic door release units

DH1369

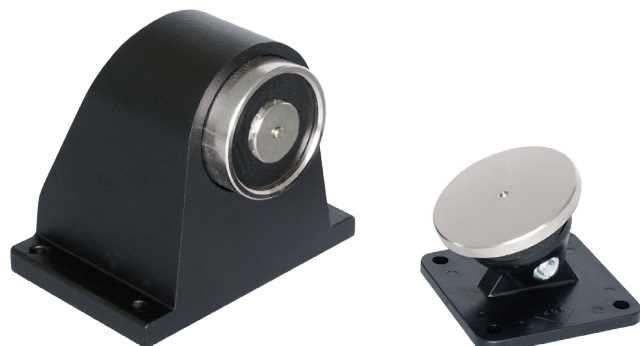

- Floor mounting
- Aluminium case
- Holding strength 50 Kg
- Release button
- Damping counter plate included

1369

Floor mounted electromagnetic door release unit

Electromagnetic door release unit for fire doors designed for floor mounting.

The aluminium case with epoxy varnishing ensures a high robustness.


Provided with dual protection diode against disturbances and polarity reversals. A built-in spring release allows residual magnetic forces to be overcome thus ensuring quick, reliable door release.

Provided with counter-plate.

1369

Housing material	Aluminium, black epoxy painting
Core material	Steel
Keeper plate material	Black thermoplastic support, steel plate
Operation	Released when de-energised
Type of connection	Wires
Operating temperature	-10°C to +55°C
Protection rating	IP40
Standard equipment	Flexible keeper plate. Release button. Protection diodes

Dimensions

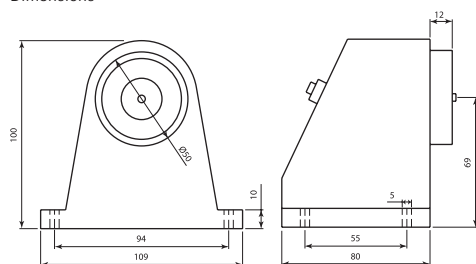

Order codes

Code	Holding strength $\pm 15\%$	Nominal voltage	Nominal current	Package weight	Notes
1369	50 Kg/490 N	24 Vdc	45 mA	0.95 Kg	2 protection diodes