

### Product Guide

**SPSM-CF0703** Surface Mount Speaker 100mm (4") 100V 5W AS ISO7240.24 White  
**SPSM-CF0704** Surface Mount Speaker 100mm (4") 100V 5W AS ISO7240.24 Black

## One-Shot® Surface Mount EWIS Fire Ceiling Speakers

- ✓ Designed to meet AS ISO7240.24 standard for fire & evacuation warning systems\*
- ✓ Excellent speech intelligibility
- ✓ High quality speaker driver developed for BGM, paging and emergency warning applications
- ✓ Patented 2 way latching system reduces installation time.
- ✓ Fitted with 4 way wire protect terminal block for loop in, loop out wiring as required by Australian Standards.
- ✓ Fitted with supervisory capacitor for line monitoring.
- ✓ High impact enclosure & grille.
- ✓ Australian designed & assembled.
- ✓ 5 year warranty.



### Application

Designed to meet AS ISO7240.24:2015\*. Fire version of our popular One-Shot SPSM-CF0703/4 speakers. Each feature flame retardant housing material and a tuned PA driver to suit the new approval requirements. One-Shot design simply snap-fits in seconds to the surface mounting ring, reducing installation time considerably. The C 0699 adaptor plate enables the surface mounting ring to be fixed to a standard conduit junction box without the need for drilling into the slab.

\*Active equalisation required to meet AS ISO7240.24 standard.

### Manufacturing & Performance

Redback® drivers are engineered and manufactured to stringent specifications ensuring maximum reliability under all operating conditions. Each driver has a power rating well above the max tapping of the transformer, ensuring reliable operation and excellent longevity. A strict quality control procedure is employed during every step of the manufacturing process. Finally, every finished speaker is 100% QC checked prior to shipping.

### About Redback® Speaker Drivers

Each custom designed speaker and transformer combination has been specifically engineered to ensure a wide frequency range and dispersion angle, plus a high sound pressure level (SPL) ensuring excellent music and speech intelligibility; which is critical for emergency paging applications.

Each transformer is fitted with multiple power settings which are user selectable via taps on the transformer.

### The Labour Saving One-Shot® Mounting System

Redback® "One-Shot®" speaker units install in seconds providing substantial labour cost savings for the professional installer compared to traditional mounting methods.

They simply snap fit to the outer mounting ring by means of the integral pressure clips. The snap clip material is formulated to retain long service life strength and spring action, ensuring a firm vibration free fit. Speaker cable entry can be either from the rear, or via surface mounted conduit (four 19mm conduit knockouts are provided).

The neutral white RAL colour of CF0703 provides an architecturally unobtrusive finish to virtually any installation. CF0704 is fitted with a black grille for use on ceilings with a dark colour.

The transformer is fitted with a 4 way wire protect screw terminal block. This is suitable for loop in, loop out cabling.

### Optional Conduit Mounting Plate

The C 0699 adaptor plate enables the CF0703 and CF0704 mounting rings to be fixed to a standard recessed conduit junction box without the need for drilling into the concrete slab, saving considerable installation time & hardware.



### Optional Surface Mount Security Cage


The C 0706 galvanised mesh enclosure has been designed to protect the CF0703 and CF0704 speakers from physical damage or theft. The robust design makes it ideal for use in schoolyards, undercrofts etc where speakers could be hit by errant basketballs.



### Product Guide

SPSM-CF0703 Surface Mount Speaker 100mm (4") 100V 5W AS ISO7240.24 White  
 SPSM-CF0704 Surface Mount Speaker 100mm (4") 100V 5W AS ISO7240.24 Black

#### Dimensions & Transformer Detail

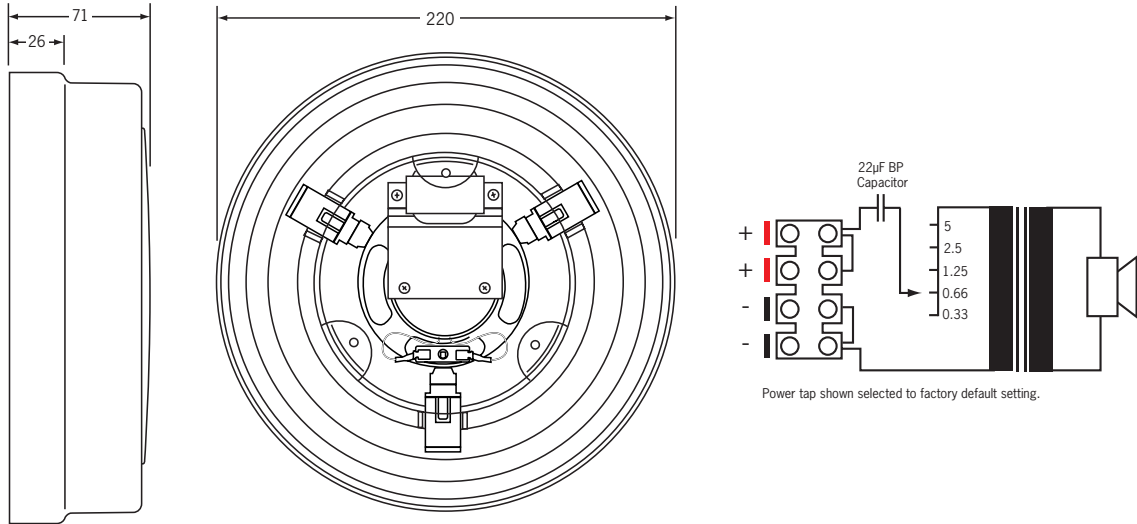

#### Specifications

##### Electrical

Rated Noise Power:	5 Watts (100V line)
100V Power Taps & Impedance:	0.33W (30kΩ), 0.66W (15kΩ), 1.25W (8kΩ), 2.5W (4kΩ), 5W (2kΩ)
Sensitivity:	88dB (1W @ 1m), 76dB (1W @ 4m)
Maximum Sound Pressure Level:	95dB (5W @ 1m), 83dB (5W @ 4m)
Frequency Response:	100Hz – 15kHz
Coverage Angle (-6dB):	1000Hz: 140°, 2000Hz: 105°, 4000Hz 80°
Environmental Type:	A (for indoor applications as per standard)
Line Monitoring:	Yes, 22µF bipolar capacitor
Applicable Cable:	2.5mm <sup>2</sup> (14AWG) max conductor area
Connection:	4 way screw terminal

##### Mechanical

Speaker Component:	100mm (4") paper cone speaker
Material:	White flame retardant ABS grille and housing (Taitalac 8540T) Clear Flame retardant ABS spring clips (Makrolon 6557)
Mounting Method:	Surface Attachment
IP Rating:	IP 21C
Dimensions:	210Ø x 67mm
Weight:	0.81kg

##### Environmental

Operating temperature:	-25°C to +55°C
Relative humidity:	< 95%

##### Additional Installation Accessories

C 0699 Conduit mounting plate

#### Architectural Specifications

##### SPSM-CF0703

The surface mount speaker shall have a 100mm speaker driver which shall operate at 100V and have power taps of 5W, 2.5W, 1.25W, 0.66W and 0.33W. It shall be approved to the AS ISO7240.24 fire and evacuation announcement standard. It shall be fitted with a 4 way wire protect terminal block for connection and 22uf bipolar capacitor for line monitoring. It shall have a SPL of 89dB (1W @ 1m). The speaker body shall be made of white flame retardant plastic and shall be surface mounted with concealed fixings. The surface mounting ring shall be provided with side and rear knockouts for conduit entry. The speaker driver shall be attached to the grill which shall be snap-fit attached to the surface mount ring. The ceiling mount speaker shall be a Redback model CF0703.

##### SPSM-CF0704

The surface mount speaker shall have a 100mm speaker driver which shall operate at 100V and have power taps of 5W, 2.5W, 1.25W, 0.66W and 0.33W. It shall be approved to the AS ISO7240.24 fire and evacuation announcement standard. It shall be fitted with a 4 way wire protect terminal block for connection and 22uf bipolar capacitor for line monitoring. It shall have a SPL of 89dB (1W @ 1m). The speaker body shall be made of black flame retardant plastic and shall be surface mounted with concealed fixings. The surface mounting ring shall be provided with side and rear knockouts for conduit entry. The speaker driver shall be attached to the grill which shall be snap-fit attached to the surface mount ring. The ceiling mount speaker shall be a Redback model CF0704.

#### Required Equalisation (to meet AS ISO7240.24)

1/3rd Octave Band Centre (Hz)	Equalisation (dB)
500	9
630	11
800	9
1000	4