


Product Overview

Dual red & amber coloured strobe lights for emergency evacuation systems.

Housed on a white powder coated steel base, this unit is designed for professional installers of fire & evacuation systems. Can be installed with either two or four conductor power connections. The strobes can be selectively activated by reversing the polarity of the 24VDC supply (two conductor mode), or they can be wired independently (four conductor mode).

Features

- Robust steel base
- Low power strobes
- Polarity reversal capable
- Conduit knockouts
- White powder coated base

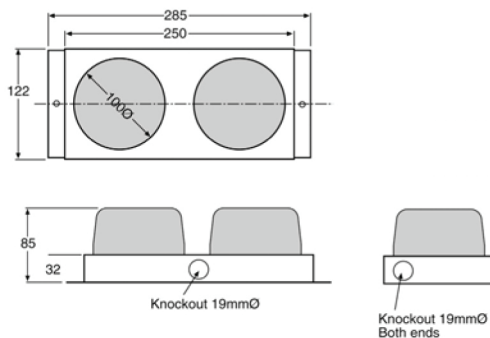

Technical Specifications

Voltage (nominal)	24VDC
Voltage (allowable)	18 – 30VDC
Current consumption	100mA
Flash rate (24VDC)	1.2Hz
Flash energy	3.12 Joules/sec
Lens colour	Red (evac) & Amber (alert)
Weight	0.62 Kg
Conduit knockout	19mm